


3/20/2019 Page 1 of 8

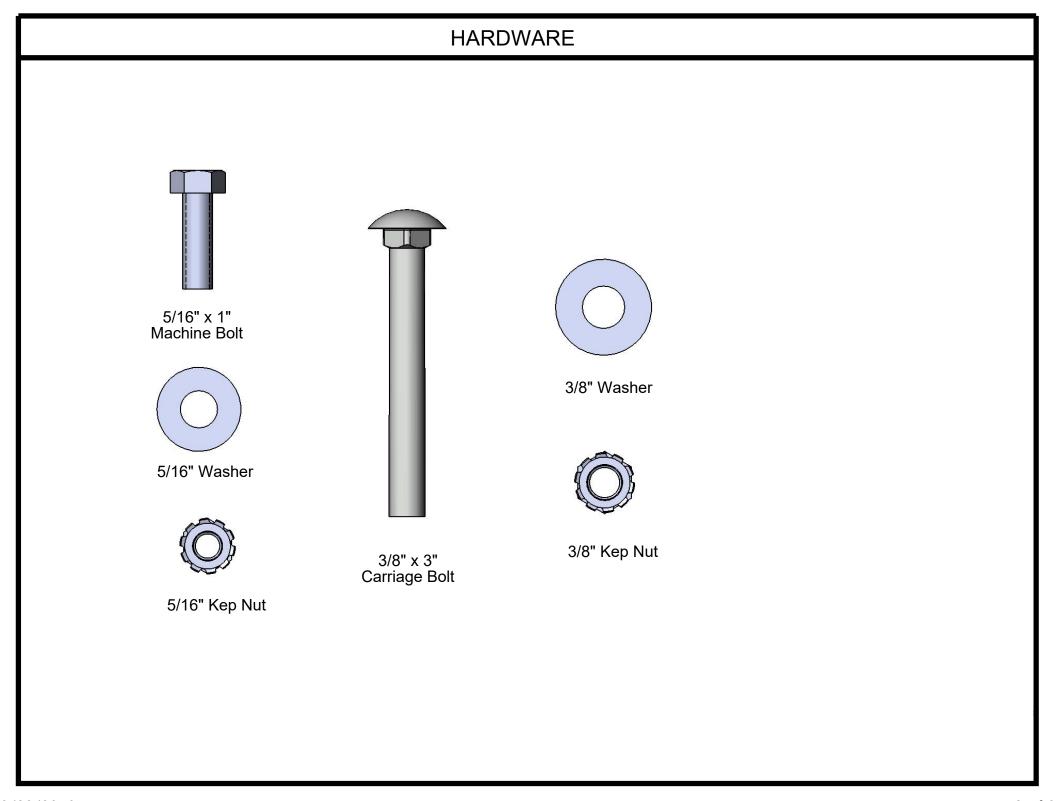

3/20/2019 Page 2 of 8

## PRODUCT SPECIFICATIONS

## B8WBINNVP PORTABLE BENCH WITH BACK

Seats & Back: 11 gauge die formed angle frame 1"x1-7/8" with 3" radius corners. Seat and back plates are fabricated from a 12ga plate. Holes are precision punched at 5/8" diameter. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Seat/back support is bent over a mandrel through the bend radius producing a wrinkle free bend. Tube ends are pre-galvanized steel capped. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Cross braces are 1" O.D. x 16 gauge pre-galvanized structural steel tubing. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: 8' bench portable with back. Seats and back are 12" wide x 96" long. Seat height is 17", seat back height is 35". Total depth of seat with back is 22-1/4".


3/20/2019 Page 3 of 8

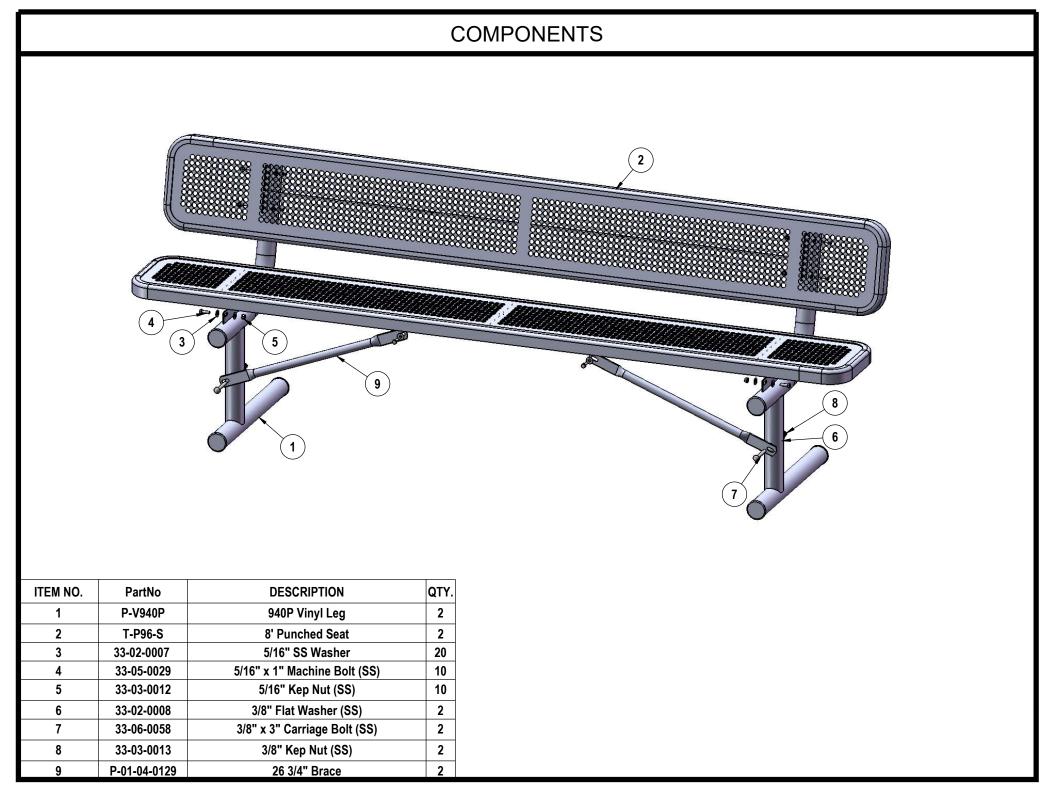

3/20/2019 Page 4 of 8

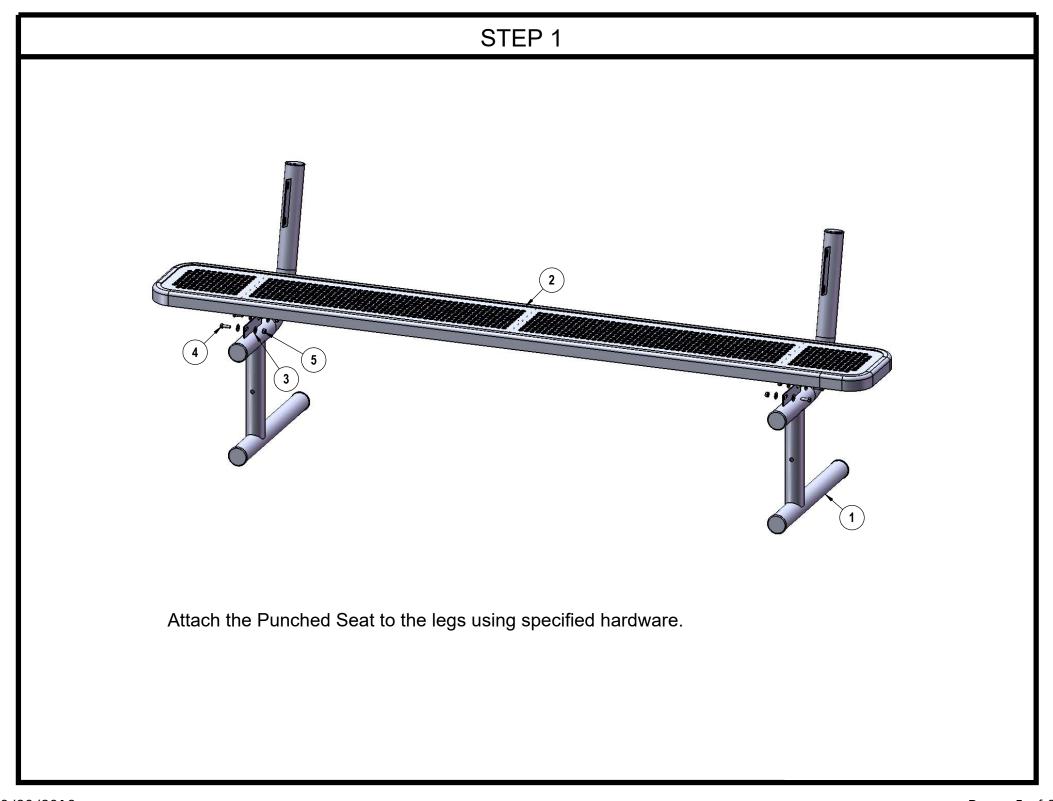


3/20/2019 Page 5 of 8

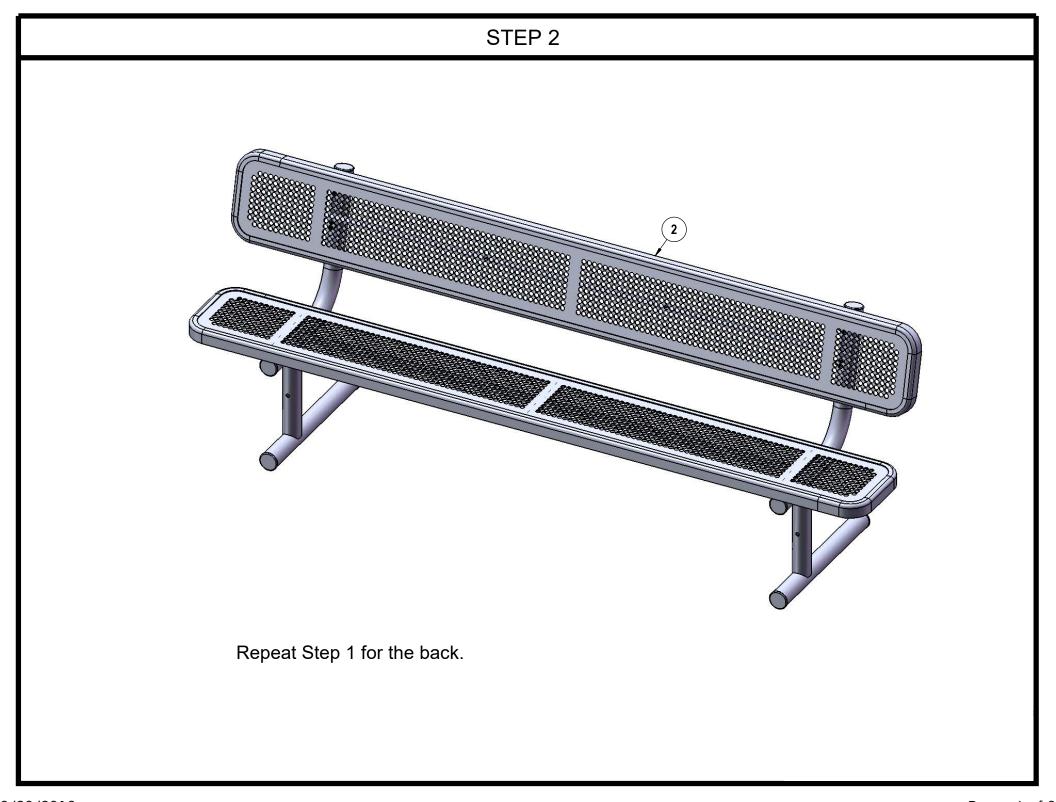


3/20/2019 Page 6 of 8

## STEP 3

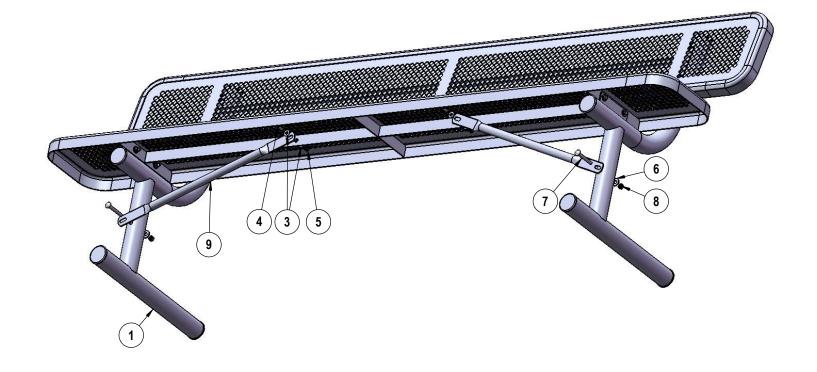

Attach the 26 3/4" Braces to the seats and legs as shown using specified hardware.

3/20/2019 Page 7 of 8

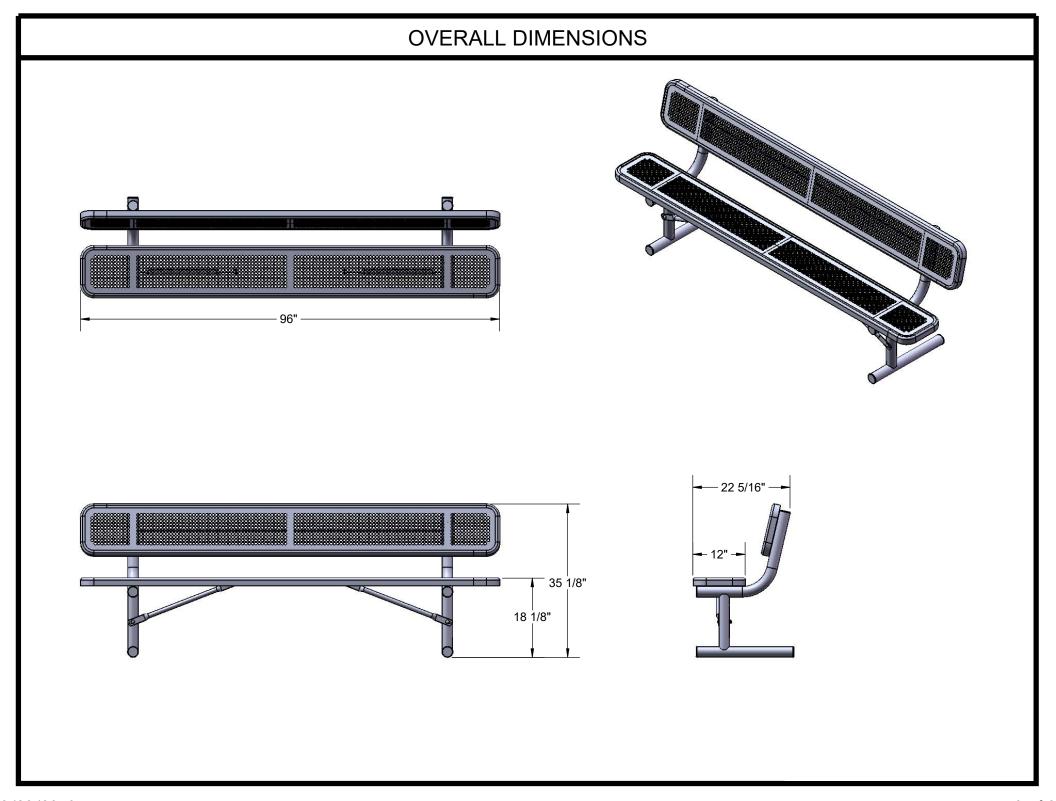

3/20/2019 Page 8 of 8