




1/24/2020 Page 1 of 9

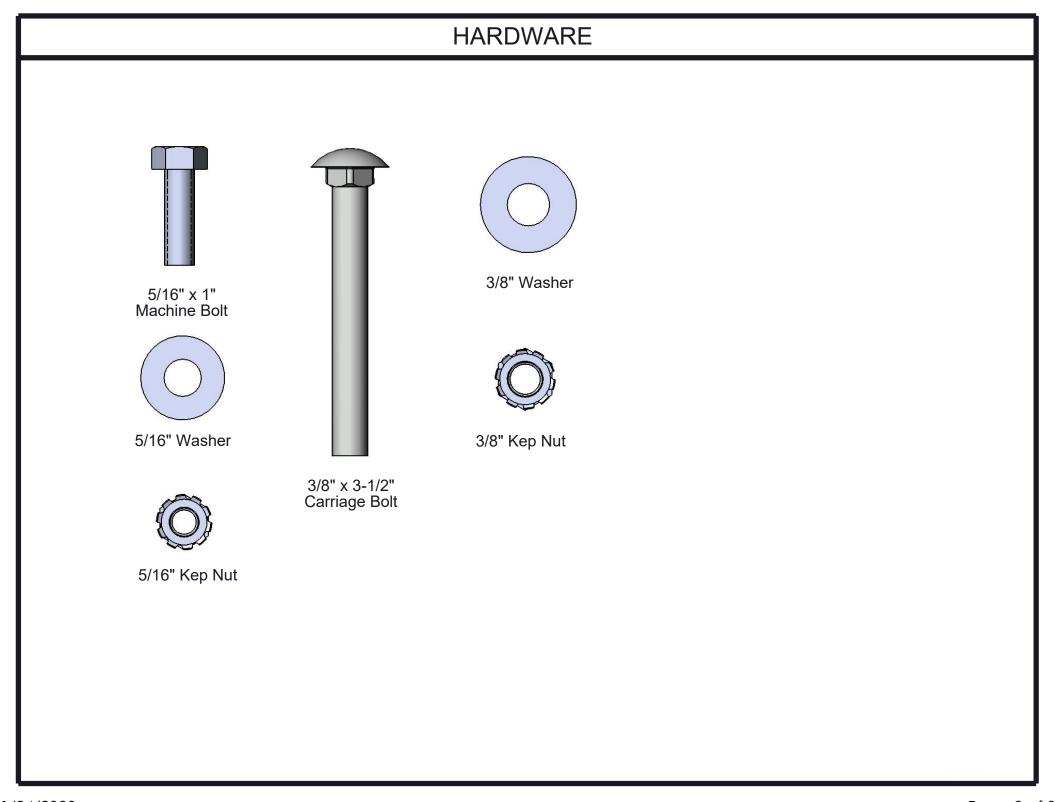



1/24/2020 Page 2 of 9

## TOOLS REQUIRED









1/24/2020 Page 3 of 9

## PRODUCT SPECIFICATIONS

## B8WBRCP PORTABLE BENCH WITH BACK

Seats & Back: Angle frame made with 2" x 2" x 1/8" structural steel angle. 3/4" #9 steel expanded metal. 10 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Seat/back support is bent over a mandrel through the bend radius producing a wrinkle free bend. Tube ends are pre-galvanized steel capped. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Cross braces are 1" O.D. x 16 gauge pre-galvanized structural steel tubing. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: 8' bench portable with back. Seats and back are 10" wide x 96" long. Seat height is 18-3/8", seat back height is 34-1/4". Total depth of seat with back is 22-3/8".


1/24/2020 Page 4 of 9

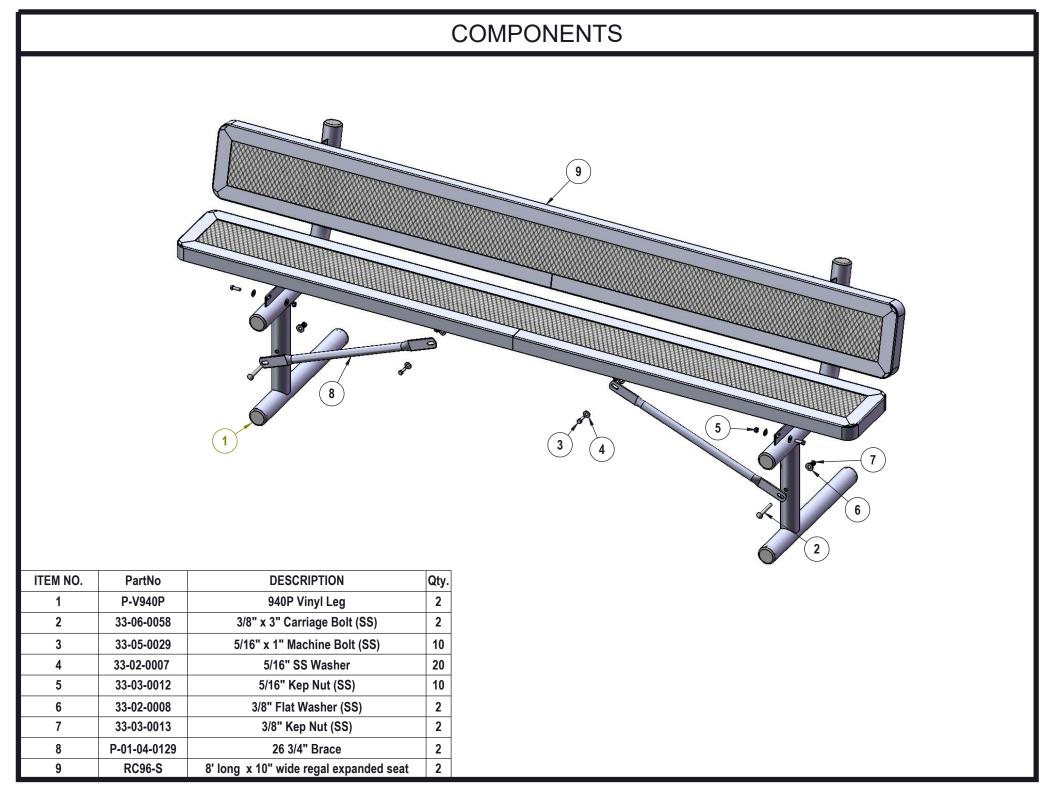


1/24/2020 Page 5 of 9

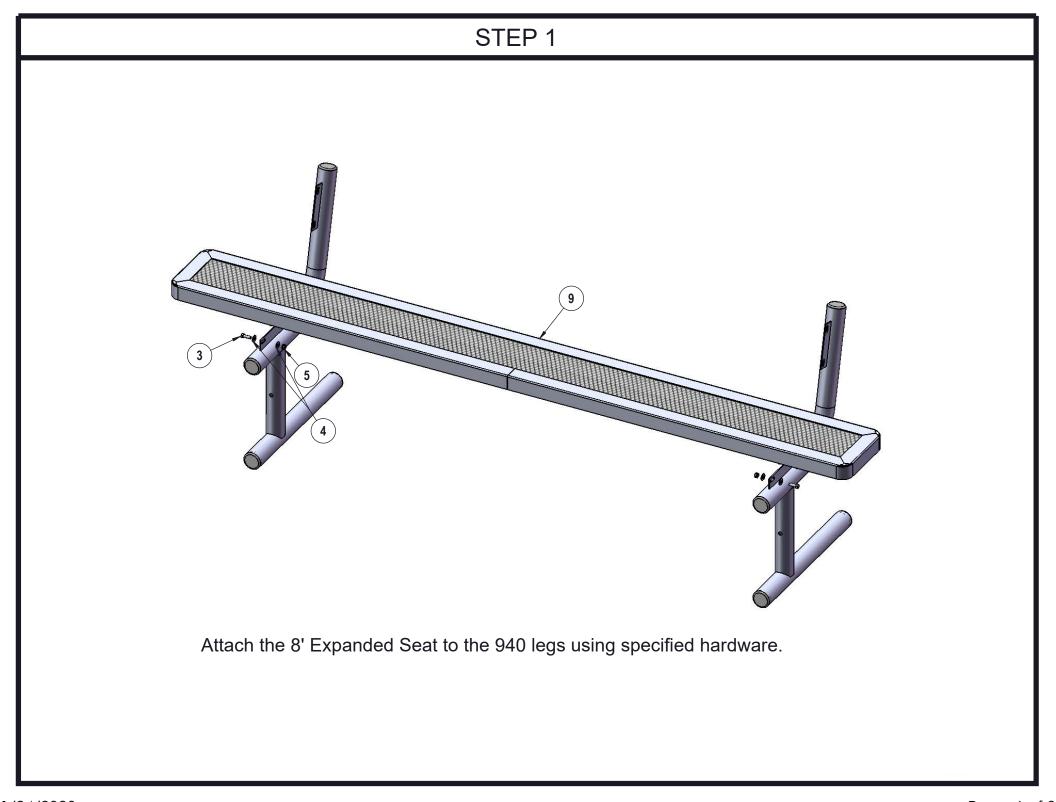


1/24/2020 Page 6 of 9

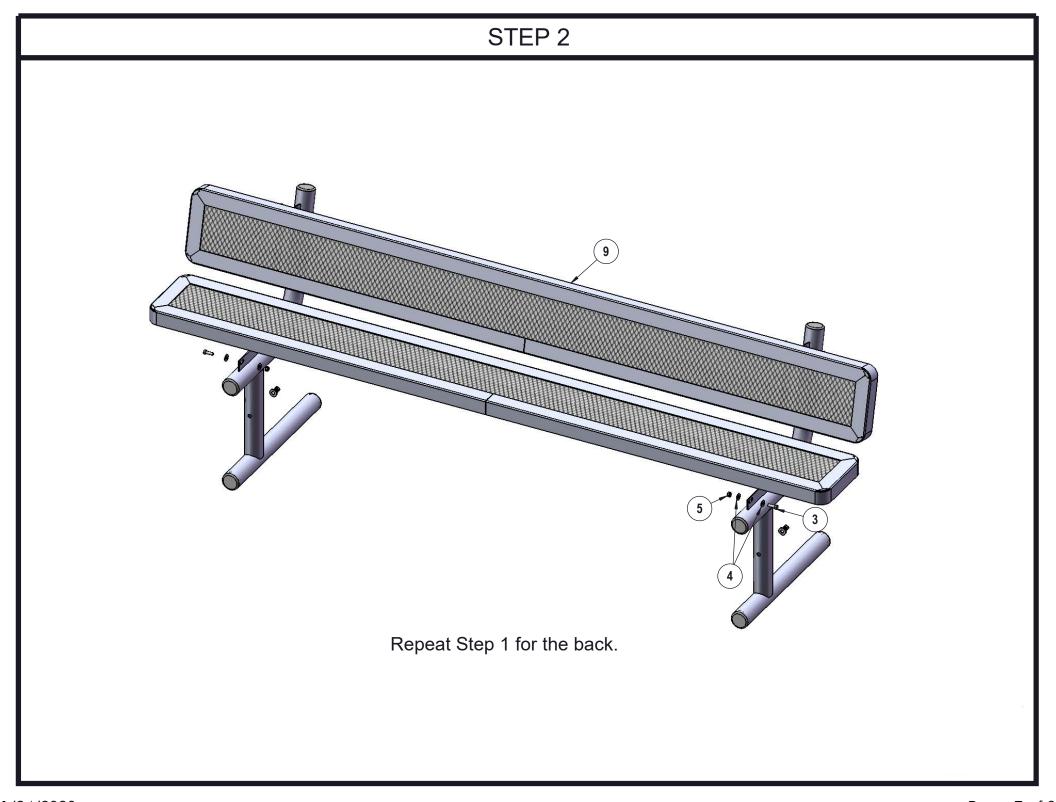

1/24/2020 Page 7 of 9

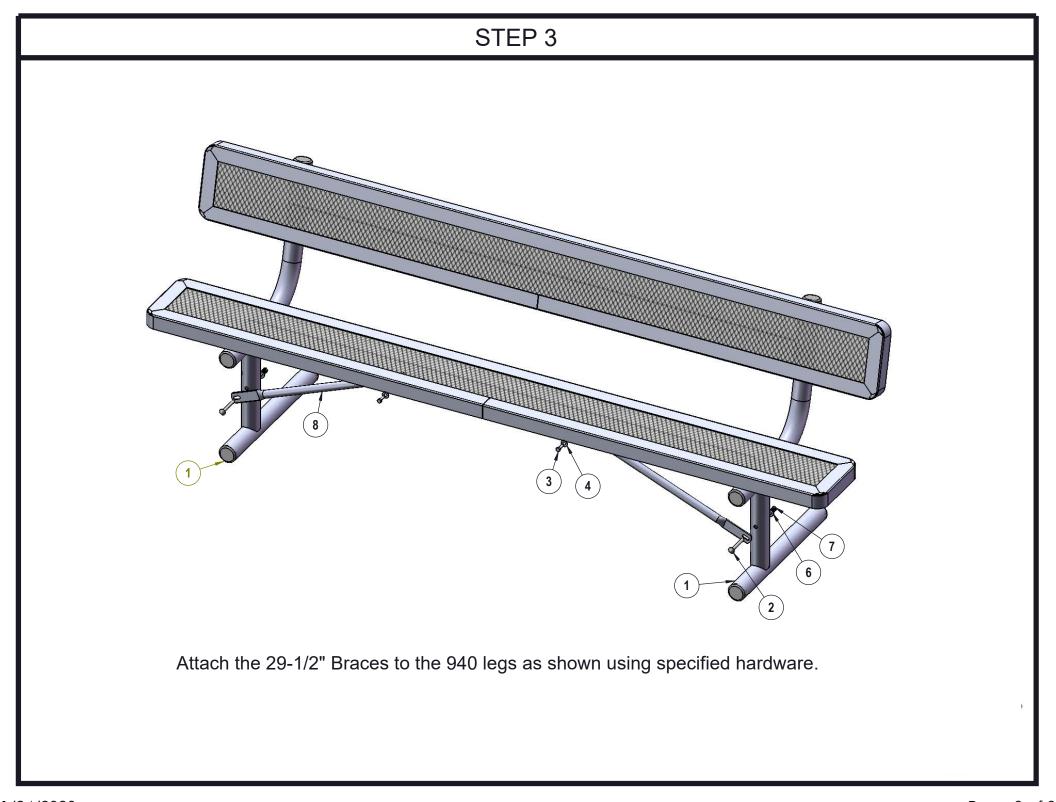

1/24/2020 Page 8 of 9

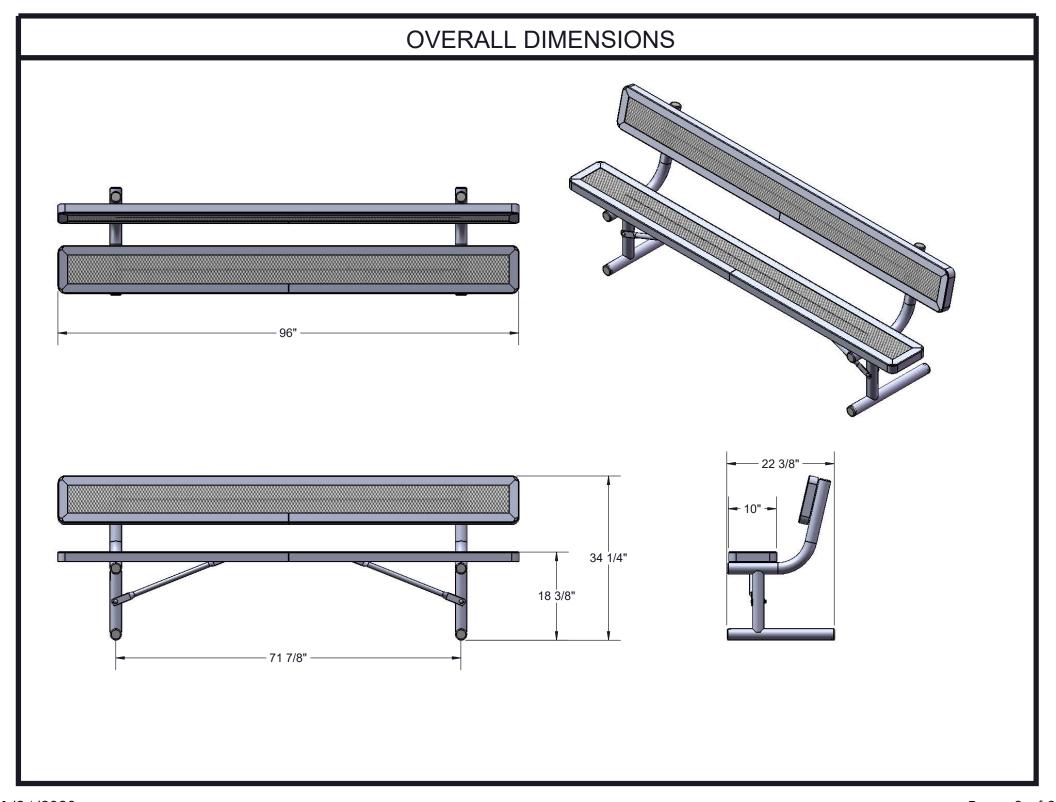

1/24/2020 Page 9 of 9