



Model #
GBS96S


HARDWARE



5/16" x 1"
Machine Bolt



5/16" Washer



5/16" Kep Nut

PRODUCT SPECIFICATIONS

GBS96S INGROUND MOUNT “MALL” BENCH

Seats: Side rails are formed from 14 gauge steel. 3/4" #9 steel expanded metal. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Seat Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 4 x 4 x 11 gauge structural zinc coated steel square tubing. Legs are capped with a 4 x 4 x 3/16" steel flat bar. Seat and top mounting points 7 gauge x 1-1/2" die stamped steel flat bar. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.


Dimensions: 8' bench inground without back. Seats are 20" wide x 96-1/8" long. Seat height is 18". Creating a 96-1/8" square.

COMPONENTS

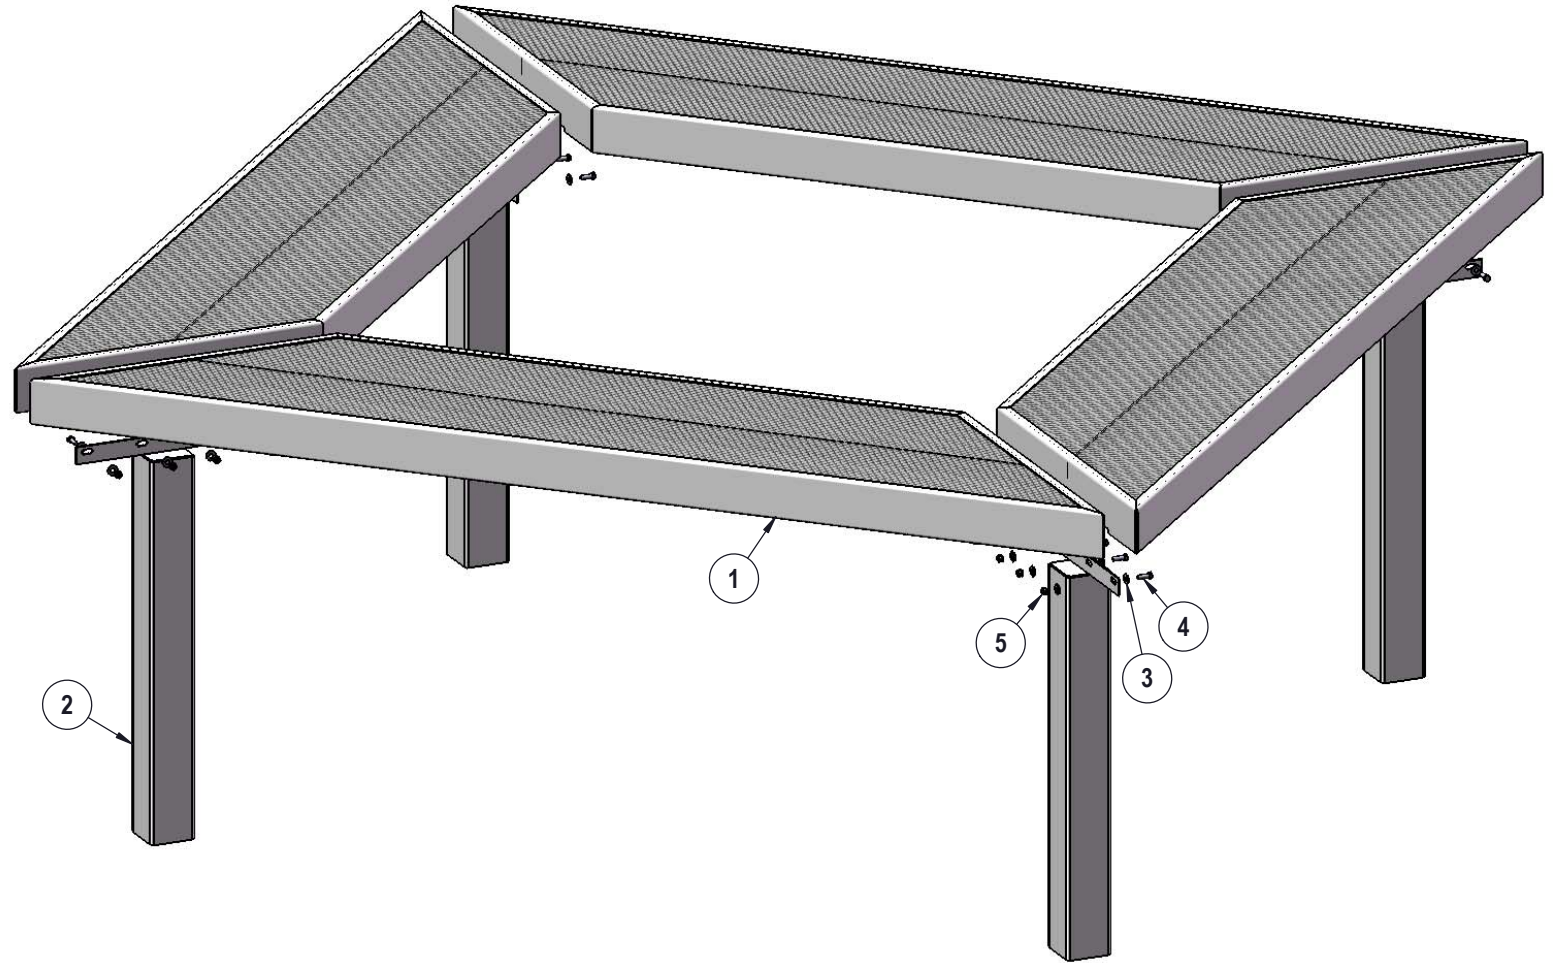

| ITEM NO. | PartNo | DESCRIPTION | QTY |
|----------|------------|---------------------------------------|-----|
| 1 | T-V96GM-S | 8' expanded geometric mall bench seat | 4 |
| 2 | P-V934S | 934 S Leg | 4 |
| 3 | 33-02-0007 | 5/16" SS Washer | 32 |
| 4 | 33-05-0029 | 5/16" x 1" Machine Bolt (SS) | 16 |
| 5 | 33-03-0012 | 5/16" Kep Nut (SS) | 16 |

STEP 1

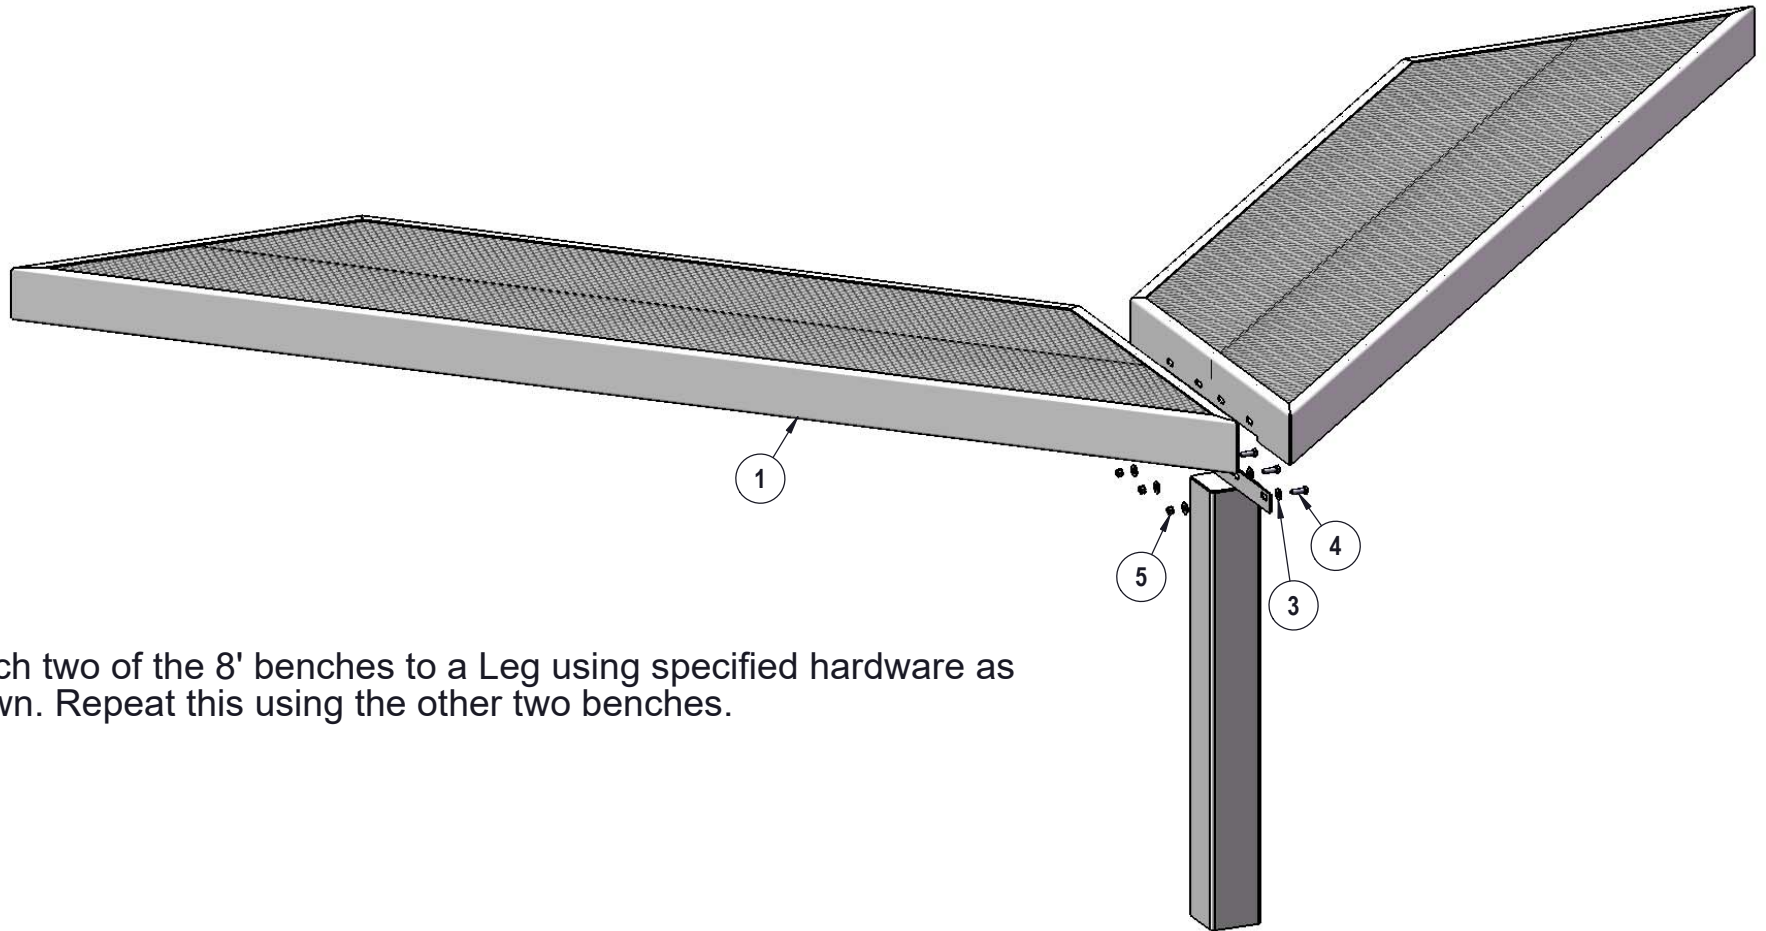


Attach two of the 8' benches to a Leg using specified hardware as shown. Repeat this using the other two benches.

STEP 2




Take note of leg position.

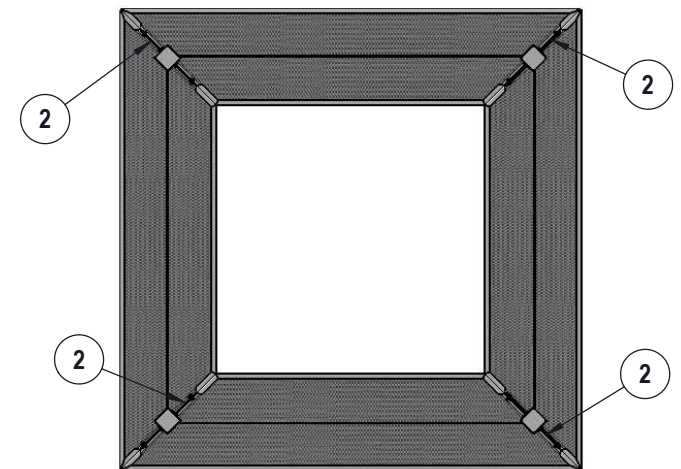

Attach the two halves of the square together using the other two legs and hardware.

FOOTINGS

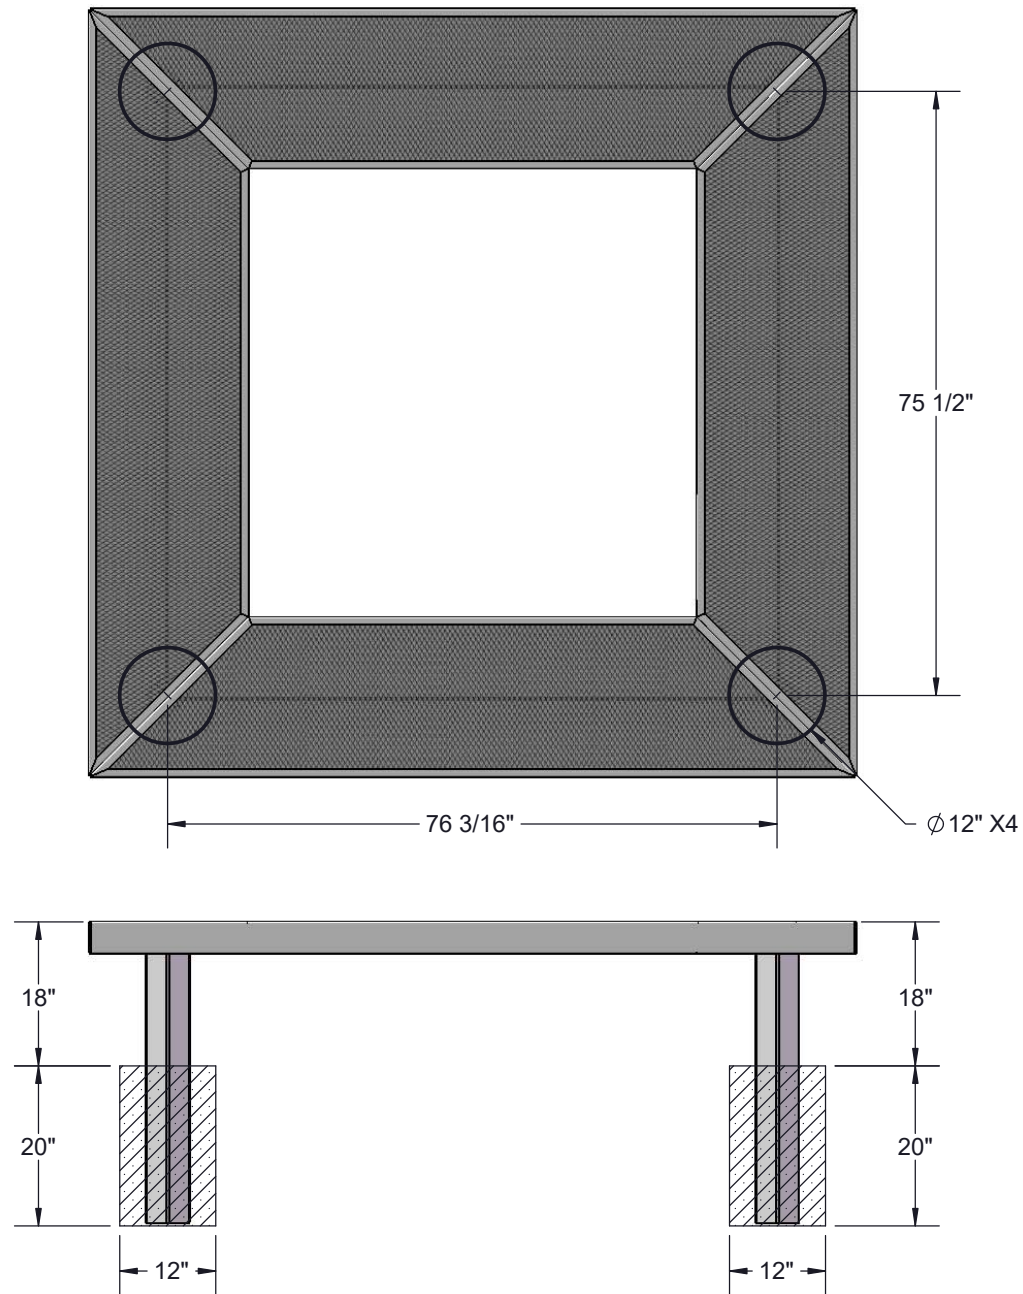

Estimated Required Concrete:
14 - 50lb Bags of Concrete Mix

OVERALL DIMENSIONS

