

SPEC SHEET: T46SQP


46' SQUARE EXPANDED METAL TABLE PORTABLE

Wt. 265 lbs


photo




top view

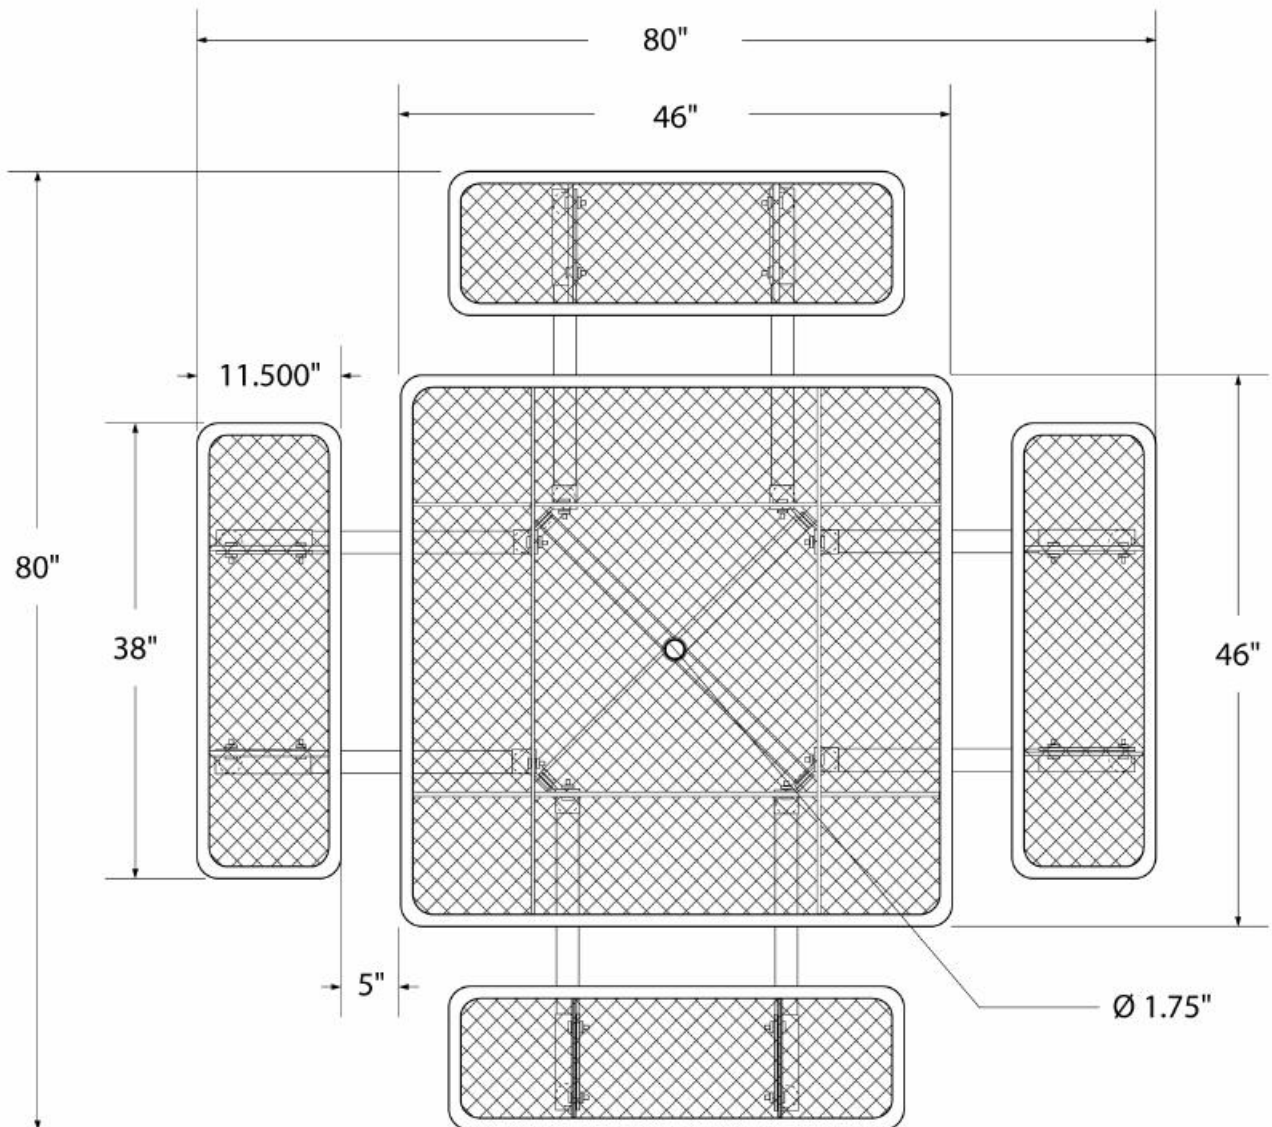

side view

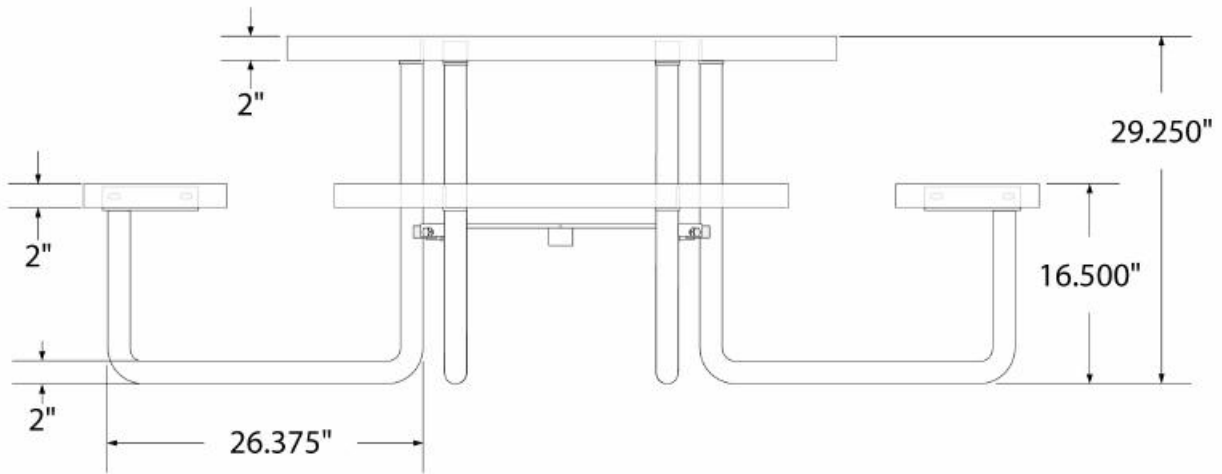

product details



Coated Surfaces:

- Thermoplastic coated
- Copolymer-based, environmentally safe
- Does not fade, crack, peel warp
- Applied at a thickness of 25-30 mils.
- 5 Year warranty on coating



Construction:


- Seats and tops - 9 gauge steel
- 2" tubular understructure
- Understructure - galvanized steel
- Understructure finish - black polyester powder coated
- Nuts, washers and bolts - galvanized steel

mounting types

P = Portable : no mount

SM = Surface Mount:
concrete anchors
through discs welded
to legs


IG= In-Ground:
J-rods set in concrete
through discs welded
to legs

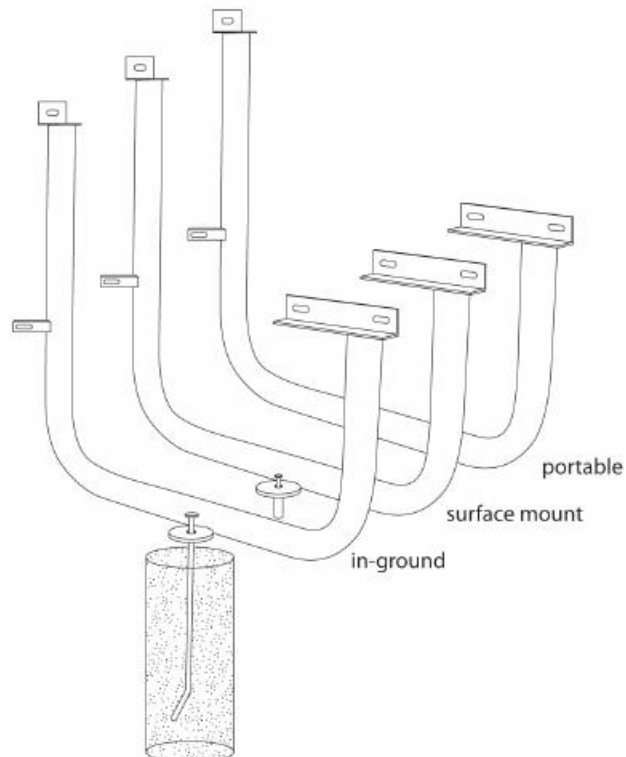

Assembly Instructions

Square Picnic Tables (T46SQ, T46SQ-CHILD, T46SQ-PERF) Surface Mount (SM), Portable (P), Inground (IG)

Always inventory the hardware shipped with your product.
Product is best assembled upside down. Bolts should be left unsecured until product is upright & leveled. Assembly requires 2-1/2" wrench.

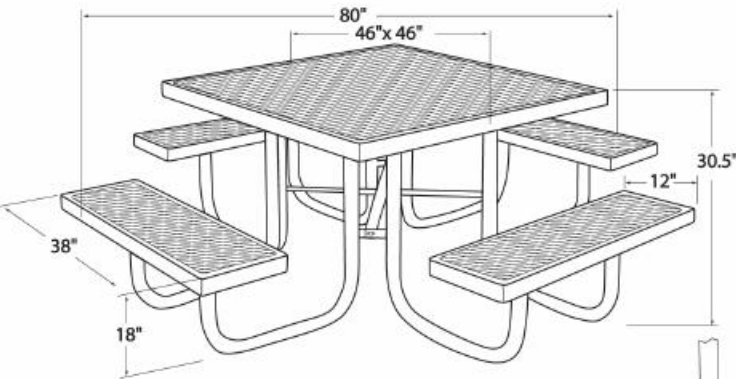


Hardware List	
Portable (P), Surface mount (SM)	
1 - 46" Square Table top	1 - 46" Mesa
4 - Seats	4 - Sillas
8 - Legs (4 left; 4 right)	8 - Patas
1 - Cross brace	(4 Izquierda; 4 Derechas)
28 - 5/16" x 1/4" Bolts	1 - Brazo de refuerzo
28 - 5/16" Nuts	28 - 5/16" x 1/4" Tornillos
56 - 5/16" Washers	28 - 5/16" Tuercas
	56 - 5/16" Rondanas

Portable (P)

Note; Holes on frame of legs, seats and table tops allow for micro adjustments.

Step 1:

Turn table top upside down. Loosely attach legs to any corner slot of table frame making sure brace tabs face one another in the corners.

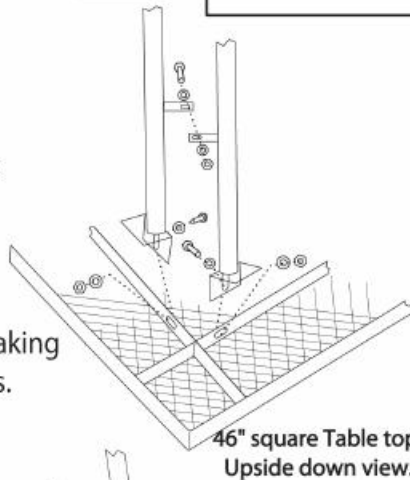


Step 2:

Loosely attach a leg to the frame nearest the corner of the first leg.

Step 3:

Align leg tabs to each other and cross brace, cross brace should be to the inside of tabs, and loosely secure.

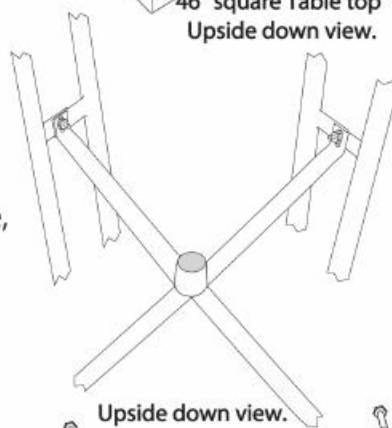

Step 4:


Repeat steps 2 & 3 for remainder of legs.

Step 5:


Once all legs have been attached to table top frame, leg tabs and cross braces attached turn the table right side up.

Step 6:

Each seat fits on the "L" bracing of 2 legs. Align the holes and attach the seats to "L" bracing. Repeat until all seats have been completed.

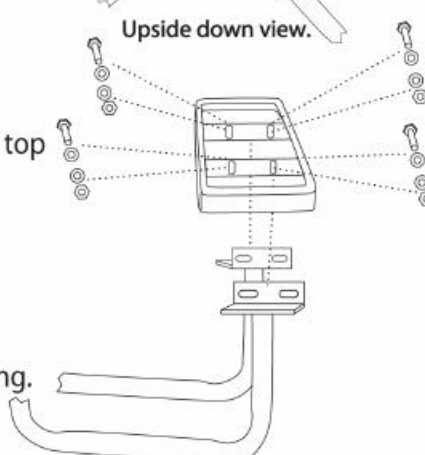

Surface Mount (SM)




Step 7:

Place table in desired location, mark through center hole of tabs. Drill (hammer drill) and mount screws with 2.5" x 3/8" sleeve anchor bolts (not provided).

In ground Mount (IG)

Additional Hardware;
2- 16" Solid steel rods.

Enterrada en el Piso
Componente Adicional;
2- 16" Barrillas de Acero



4" x 18" deep holes.

Step 8: Place table in desired location, mark through center hole of tabs. Dig 4 - 4" x 18" deep holes. Line tabs up to holes. Slide each rod through tabs and fill hole with concrete.