



FurnitureLeisure.com	PoolFurnitureSupply.com
PicnicFurniture.com	PicnicTableSupplier.com
Park Tables.com	UBrace.com

1-800-213-2401 | sales@furniturelsiesure.com

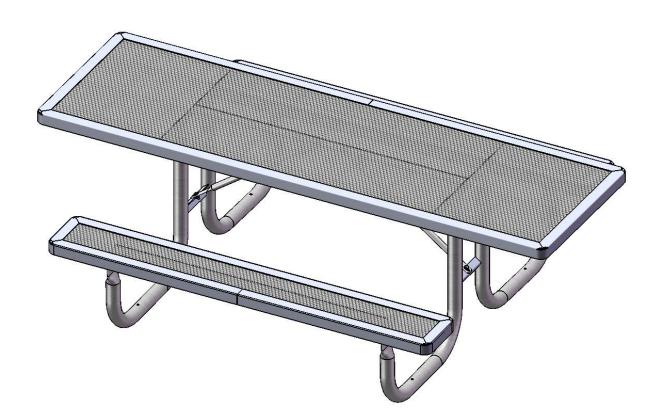


Model # T8RCHDCPALT

HARDWARE



5/16" x 1" Machine Bolt



5/16" Washer



5/16" Washer

PRODUCT SPECIFICATIONS

T8RCHDCPALT PORTABLE PICNIC TABLE WALK THROUGH DESIGN

Seat & Back: 2" x 2" x 1/8" formed angle frame with 1-1/2" radius corners. 3/4" #9 steel expanded metal. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.


Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Cross braces 1" O.D. x 16 gauge pre-galvanized structural steel tubing. Brace attachment points 1-1/2"x1-1/2"x3/16" steel angle. Seat and top mounting points 7 gauge x 1-1/2" die stamped steel flat bar. Legs are bent over a mandrel through the bend radius producing a wrinkle free bend. Holes are predrilled in legs for optional surface mounting. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: 8' portable pincinc table walk-through desing. Top is 30" wide x 96" long x 30-13/16" high. Seats are 10" wide x 72" long x 18-13/16" high. Outisde to outside dimensions are 67-7/16" x 96".

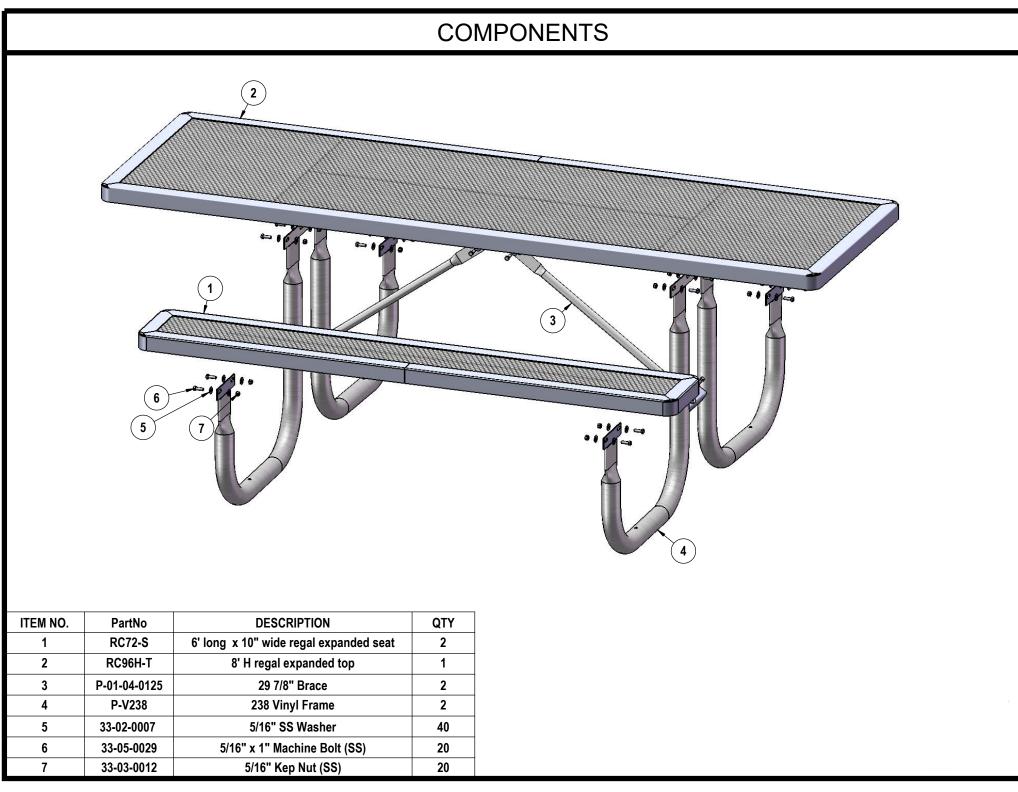



1/10/2020

Page 4 of 8

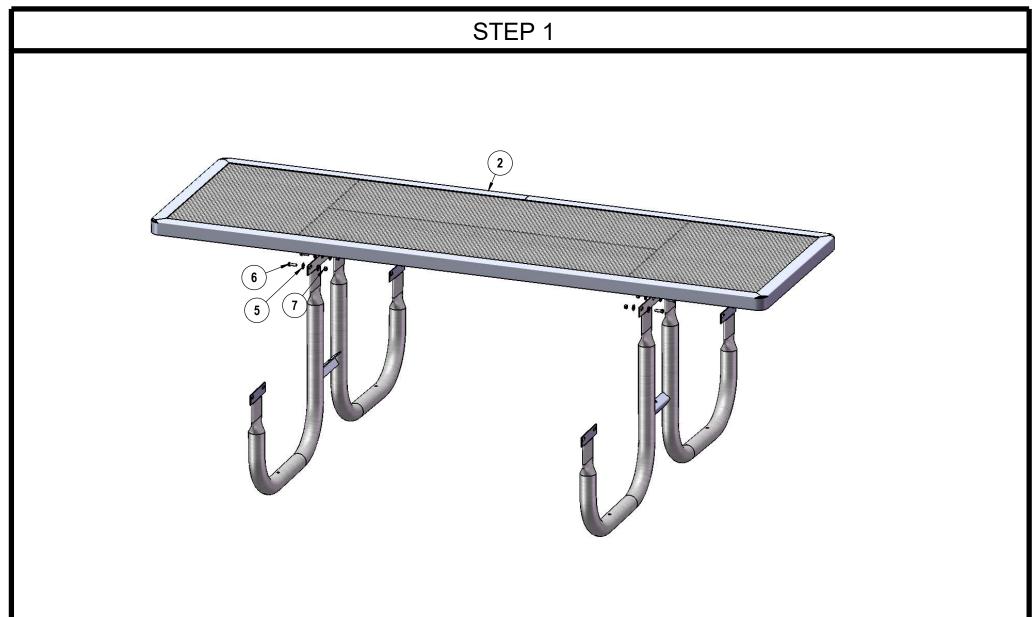

Attach the top to the top legs as shown using specified hardware.

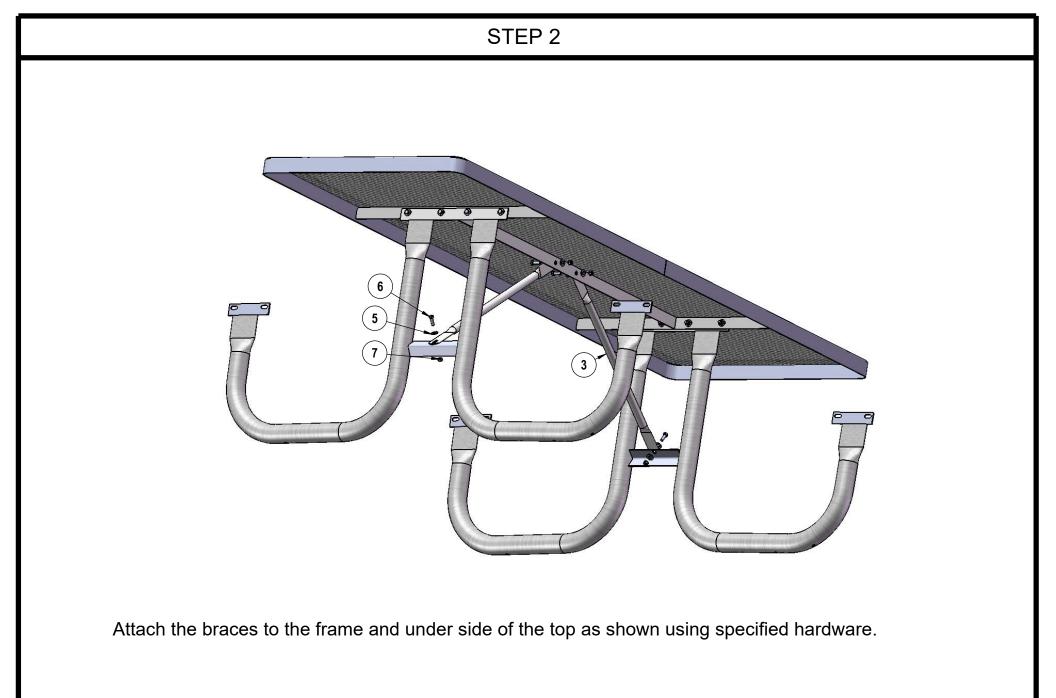

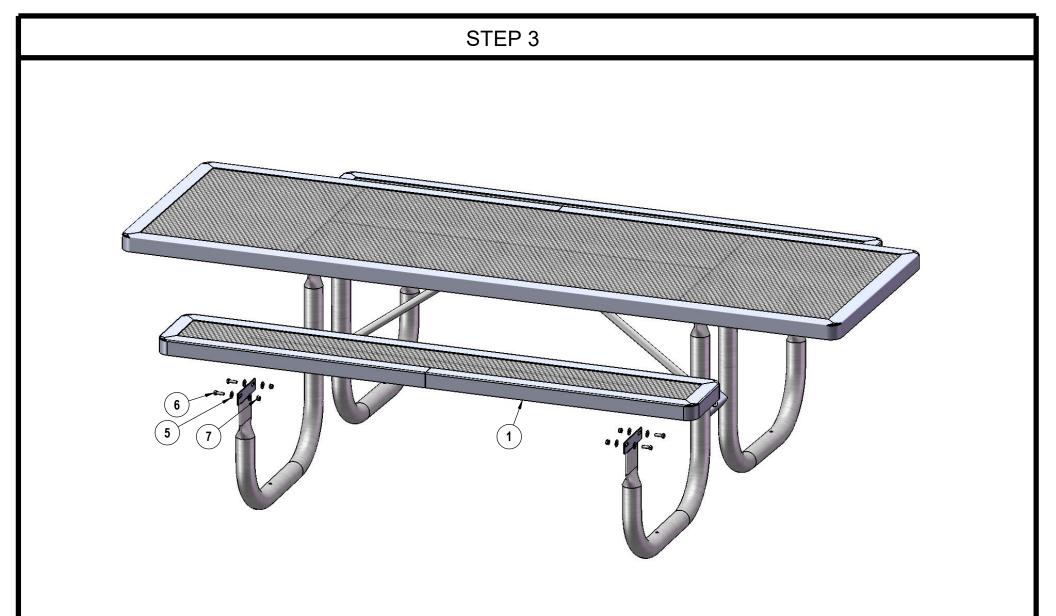

Attach the seats to the frame as shown using specified hardware.

OVERALL DIMENSIONS

